


BEAD TYPE SEAL

Screw in

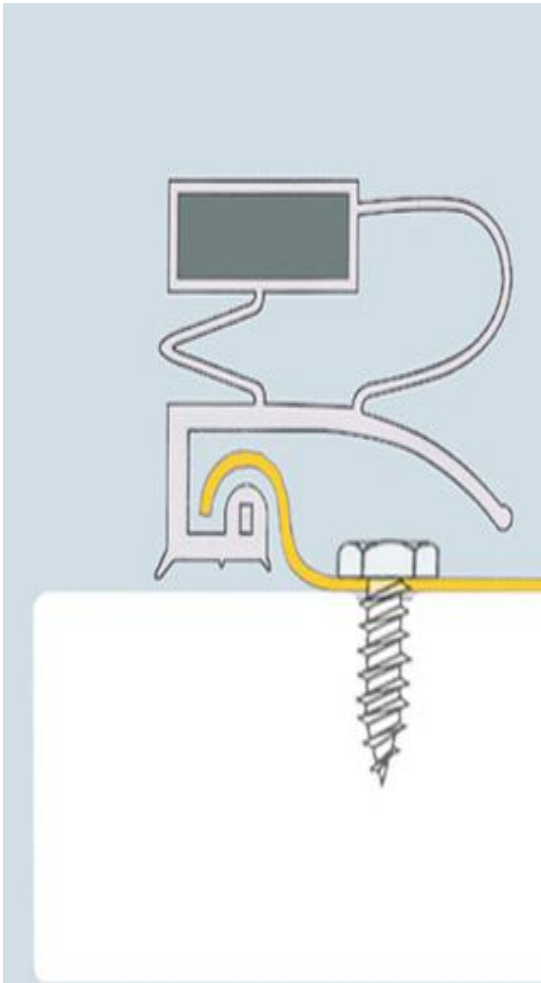

The screws are located behind the seal. Loosen the screws enough to allow the seal to be pulled out. Do not remove the screws completely.

Clean the area and push the new seal into the gap. Do the corners first starting at the top. Then work towards the centre along each length. This will stop the seal stretching.

Secure the corner screws and close the door to check alignment. Sometimes the door can twist and it will be necessary to twist the door back into alignment. Ensure the seal on hinge edge does not catch and roll. If so, lubricate the seal. I use food grade silicon but Vaseline or talcum will work.

Secure the remainder of the screws.

Recheck the seal is complete on all sides. It may be necessary to warm the seal with a hair dryer to make it pliable and allow the magnet to pull the seal into shape.

Tips



Place some blocks of wood under the front wheels or feet of the fridge to gain better access to the bottom of the door.

Laying the new seal on a flat surface in the sun or on a warm car bonnet, magnet down for one hour will make it more pliable and a better shape to fit. Try not to stretch the seal. If you do, lay it flat in a cool room overnight.



The magnets out of your old seal are great for children's craft. Make you own fridge magnets or designs on the fridge.