


## PUSH IN TYPE SEAL

The easiest to replace.

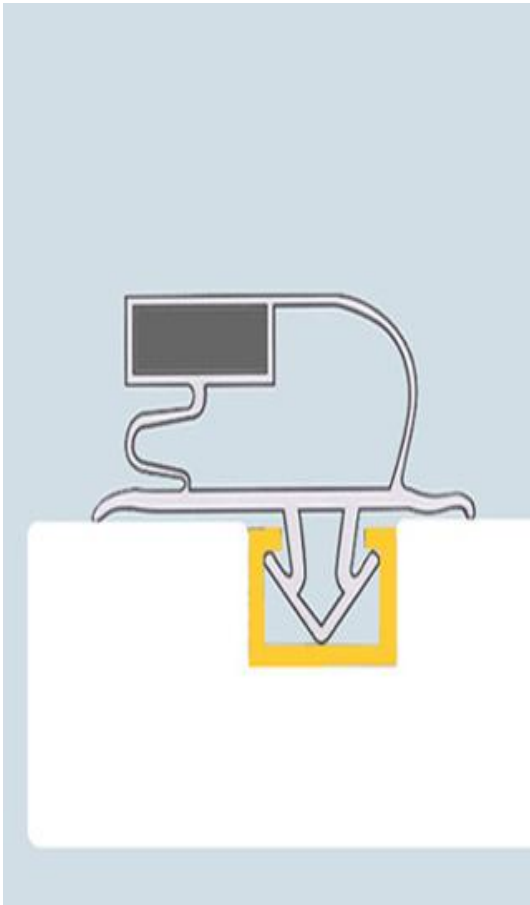

Pull the old seal out of its channel and clean the area.

Starting at a top corner push the arrowhead into the channel. Do this to all corners.

Continue pushing the seal into its channel making sure the seal is evenly distributed and the arrowhead is fully inserted all the way around.

Close the door and check the seal is complete on all sides. Ensure the seal on the hinge edge does not catch and roll. If so, lubricate the seal. I use food grade silicon but vaseline or talcum will work. It may be necessary to warm the seal with a hair dryer to make it pliable and allow the magnet to pull the seal into shape.

## Tips



Place some blocks of wood under the front wheels or feet of the fridge to gain better access to the bottom of the door.

Laying the new seal on a flat surface in the sun or on a warm car bonnet, magnet down for one hour will make it more pliable and a better shape to fit. Try not to stretch the seal. If you do, lay it flat in a cool room overnight.



The magnets out of your old seal are great for children's craft. Make you own fridge magnets or designs on the fridge.